

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 766 063 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
02.04.2003 Bulletin 2003/14

(51) Int Cl.7: **G01B 11/24, G01M 11/02**

(21) Application number: **96307056.0**

(22) Date of filing: **27.09.1996**

(54) **Lens parameter measurement using optical sectioning**

Linsenparametermessung mittels optischer Durchschneidung

Mesure de paramètres de lentilles par la section optique

(84) Designated Contracting States:
AT BE CH DE DK ES FR GB GR IE IT LI NL PT SE

(30) Priority: **29.09.1995 US 536158**

(43) Date of publication of application:
02.04.1997 Bulletin 1997/14

(73) Proprietor: **JOHNSON & JOHNSON VISION
PRODUCTS, INC.
Jacksonville, Florida 32216 (US)**

(72) Inventor: **Ross, Denwood F., III
Green Cove Springs, Florida 30243 (US)**

(74) Representative: **Mercer, Christopher Paul et al
Carpmaels & Ransford
43, Bloomsbury Square
London WC1A 2RA (GB)**

(56) References cited:
**EP-A- 0 491 663 EP-A- 0 561 178
WO-A-95/22925 GB-A- 2 093 605
US-A- 4 863 260**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 766 063 B1

Description

[0001] The present invention relates generally to the measurement of contact lens parameters by using an optical sectioning technique, and more particularly pertains to a lens parameter measurement using optical sectioning.

[0002] The accurate measurement of contact lens parameters has presented a problem in the prior art. While a current method for measuring a contact lens diameter (D) is reliable, no method exists at all for measuring the front radius of curvature (FC) of a contact lens. The method for measuring the back radius of curvature (BC) of a contact lens is instrument/operator specific, and the methods for measuring the center thickness (CT) of a contact lens involve physically deforming or destroying the lens.

[0003] The measurement of the base curve and center thickness of a contact lens can be very difficult. The current base curve measurement is performed by an ultrasound technique for measuring the back sag at a predetermined diameter. Aside from errors introduced by variations in the temperature of the solution in which the contact lens is immersed, the lens itself is not perfectly spherical, and thus does not fulfill the requirements of the geometrical equation used to transform back sagittal height readings into radius of curvature values. In addition, the device cannot measure the front radius of curvature of the contact lens, nor can it measure the asphericity or toricity of either the front or back curve of the contact lens. The centre thickness is measured by lowering a plunger onto a wet contact lens mounted on a pedestal, and measuring the difference in height from the pedestal alone. This measurement technique suffers from variable rates of material deformation from the measuring force attributable to material modulus, inconsistent plunger counter weight force, and lens design. A non-contacting measurement technique would be much preferable.

[0004] International patent application WO95/22925 to Keravision, Inc. discloses a method and an apparatus for mapping the surface of an object, whereby a light pattern is projected on the surface of the object and parameters are measured from the detected reflection.

[0005] European patent application EP0561178 to Roke Manor Research Limited discloses apparatus for the measurement of the curvature of a surface. The apparatus comprises a source of electromagnetic radiation, means for detecting the electromagnetic radiation, means for focusing the radiation which has been reflected from the surface onto the detector, and means for processing the output signal from the detector. Accordingly, the signal processor provides an indication of the curvature of the surface.

SUMMARY OF THE INVENTION

[0006] The present invention is directed to a method

of measuring desired parameters of a contact lens (64) by optical sectioning comprising:

- a. positioning a contact lens on a support fixture;
- b. generating a line of light;
- c. directing the line of light through the contact lens;
- d. detecting an image of the light scattered at the surfaces of the contact lens; and
- e. analysing the detected light image to measure the desired parameters of the contact lens; characterised in that:

the line of light is directed through a selected diameter of the contact lens such that the line of light bisects the contact lens;
the step of detecting the image of the light is performed on light scattered at the surfaces of the contact lens at the selected diameter to generate a cross-sectional image at the selected diameter; and
deducing the desired parameters of the contact lens from said cross-sectional image.

[0007] The present invention is further directed to an apparatus for measuring desired parameters of a contact lens by optical sectioning comprising:

- a. a support fixture for positioning a contact lens being measured;
- b. means for generating and directing a line of light through the contact lens; and
- c. means for detecting an image of the light scattered at the surfaces of the contact lens, and for analysing the detected light image to measure the desired parameters of the contact lens; characterised in that:

the line of light is directed through a selected diameter of the contact lens such that the line of light bisects the contact lens; and
the detecting means detect light scattered at the surfaces of the contact lens at the selected diameter to generate a cross-sectional image at the selected diameter, from which the desired parameters of the contact lens can be deduced.

[0008] The subject invention provides an optical sectioning technique for measuring at least four basic parameters of a contact lens comprising the diameter (D), front radius of curvature (FC), back radius of curvature (BC), and centre thickness (CT), which can be measured directly or deduced from a cross-section of the lens. The present invention uses a line or sheet of light to illuminate and highlight a cross-sectional view of an immersed lens. That cross-sectional view contains all of the information necessary to obtain all four parameters directly, without contacting or destroying the lens.

[0009] In one embodiment, the 4880 Å line of an Ar²⁺ laser is collimated, and then focused with a cylindrical lens onto a contact lens. The resulting line of light is directed onto a support fixture with a cup which contains a slotted pedestal. The cup is filled with a saline solution, and the lens is placed on a pedestal completely immersed under the surface of the solution; and the line of light is adjusted so as to pass through the middle of the contact lens. A charge coupled television (CCTV) camera detects the light scattered from the surfaces of the contact lens, and a software program analyses the image to obtain the desired parameters of the contact lens.

[0010] The present invention has many advantages over present prior art techniques. It is noncontacting, and operates in reflection so that the optical inspection can be performed "in-package", and is very compact. Also, it combines in one instrument the functions now accomplished by a micro-comparator, ultrasound gauge, Rehdergauge, and microscope. Additionally, the front curve radius of the contact lens can be measured, which is not presently possible and could be of great benefit, particularly for aspheric contact lenses.

[0011] The optical sectioning technique provides a very useful method for determining a contact lens diameter, front and back curvature, thickness and power. The measurement of these parameters is much more accurate than any current prior art methods, and can advantageously be used to measure lenses in packages. The optical sectioning technique is also much more accurate than all current prior art methods, and is less expensive than the multiple instruments in usage today. The measurement technique is noncontacting, nondestructive, and nonintrusive. Image processing is employed to enhance the image and calculate the lens parameters. It also can measure aspects of contact lenses which no other prior methods can measure, such as the asphericity of the front and back surfaces. Lens designs using asphericity cannot be measured using any known prior art method, nor can any unintentional asphericity be detected. The optical sectioning technique can also be applied to bifocal lenses, particularly concentric annular ring contact lens designs.

[0012] The technical approach is to form a line of light which is directed through a lens, immersed in a saline solution, and positioned on a pedestal. The line of light travels parallel to the lens center of rotation axis and bisects the lens. Scattered light is imaged onto a CCD camera, and the resultant image is enhanced and analyzed. The optical elements used in the detection system can include a flat, a wedge, and an imaging lens system. The resultant image is analyzed using a nonlinear least squares fitting data processing approach.

[0013] A wideband light source is preferably used to decrease pixellation from speckle. The instrument is designed for compactness and ease of usage with interchangeable sample holders or cells for different types of contact lenses, single button operation, and easy cal-

ibration.

[0014] In accordance with the teachings herein, the present invention provides a method and apparatus for measuring desired parameters of a contact lens by optical sectioning which comprises positioning a contact lens on a support fixture. A line of light is generated and directed through a selected diameter of the contact lens. An image is detected of the light scattered at the surfaces of the contact lens at the selected diameter, and the detected light image is analyzed to measure and determine the desired parameters of the contact lens.

[0015] In greater detail, the analysis provides the measured parameters of at least four basic parameters of a contact lens comprising the diameter (D), front radius of curvature (FC), back radius of curvature (BC), and center thickness (CT). The analysis can provide additional measured parameters of the contact lens which include the front radius of curvature with aspheric form, the back radius of curvature with aspheric form, the lenticular curve radius, the peripheral curve radius, the sagittal height, aspherical deviations, and the power of the lens.

[0016] The line of light is directed onto a support fixture which includes a container in which a pedestal is positioned, and the container is filled with a saline solution. The contact lens is placed on the pedestal completely immersed in the solution, and the line of light is directed over the edge of the container and through a selected diameter of the contact lens. A charge coupled television (CCTV) imaging camera detects the image of the light scattered from the surfaces of the contact lens. The imaging camera is preferably positioned at a right angle to a light source used to illuminate the contact lens. The imaging camera is elevated with respect to and views the lens at an angle greater than the critical angle relative to the surface of the saline solution, which is the minimum angle at which light is transmitted and below which all light is reflected and none transmitted by the surface of the saline solution.

[0017] The optical sectioning measurement can advantageously be utilized on a contact lens which is immersed in saline packaging solution in a packaging container.

[0018] The detection system can include an optical flat, an optical prism mounted on the optical flat, and an optical imaging system.

[0019] The image is analyzed by a software program which uses a nonlinear least squares fitting data processing approach. The analysis includes an image processing macro routine which combines several morphological routines into one sequence which is executed for each image, the result of which is stored digitally, and the stored image is then input to a software routine for calculation of selected parameters of the contact lens. The parameter calculation is based upon a nonlinear regression based upon the residuals error from a Taylor Series expansion of an expected contact lens curve profile.

[0020] The beam of light is shaped and focused in an arrangement in which light from a light source passes through a spatial filter, is collimated by a collimating lens, and is focused by a cylindrical lens into a line of light at the contact lens being measured. The line of light is directed onto the support fixture which includes a central support button, surrounded by alignment posts to properly position a contact lens within the support fixture. The central support button and alignment posts are positioned at a level A in the fixture, and the top of the alignment posts do not extend above a level B. An optical flat with a prism positioned thereon is slidably positioned on slide rails at the level B. A cavity in the fixture is filled with saline solution, and the optical flat is guided by the slide rails to slide to one side while clearing the area over the central support button and alignment posts. The contact lens being measured is lowered into the saline solution between the alignment posts, and comes to rest on top of the central support button in an essentially horizontal position. The optical flat is then slid to a second opposite side to position it above the contact lens for an optical sectioning measurement.

[0021] In the detection arrangement, light from the illuminated contact lens is directed by imaging optics onto a camera, an image is captured by a frame grabber and digitally stored in memory, the stored digital image is then subjected to image processing, including image enhancement, curve fitting, and measurement of parameters of the lens by the application of selected known algorithms which are available commercially in software.

[0022] The foregoing objects and advantages of the present invention for a lens parameter measurement using optical sectioning may be more readily understood by one skilled in the art with reference being had to the following detailed description of several preferred embodiments thereof, taken in conjunction with the accompanying drawings wherein like elements are designated by identical reference numerals throughout the several views, and in which:

Figure 1 illustrates a flow chart of a preferred process for lens parameter measurement using optical sectioning pursuant to the present invention;

Figure 2 illustrates one embodiment on an optical arrangement for shaping and focusing a beam of light in which light from a source passes through a spatial filter, is collimated by a collimating lens, and is focused by a cylindrical lens into a line of light at the contact lens being measured;

Figures 3, 4 and 5 are respectively top planar, and end and side elevational, views of a support fixture for holding a contact lens during the measurement technique of the present invention;

Figures 6 and 7 are respectively side elevational and top planar views of a central support button and surrounding alignment posts to properly position a contact lens within a support fixture;

Figures 8 and 9 are respectively top planar and side elevational views of an optical glass flat, having a prism positioned on top thereof, positioned on slide rails;

Figure 10 is a side elevational view of only the optical flat and slide rail assembly; and

Figure 11 illustrates a curve fit approximation to the measured points of a contact lens pursuant to the processing techniques of the present invention, with the curve being of sag in pixels versus distance in pixels across a measured cross-section of a contact lens.

[0023] The present invention provides a nondestructive measurement technique for measuring all of the physical dimensions of a hydrated contact lens. The measurable dimensions include the front curve radius, lenticular curve radius, peripheral curve radius, back curve radius, diameter, center of lens thickness, sagittal height, power, and aspherical deviations. The lenticular and peripheral juncture is also discernible. Heretofore in the prior art, many of these parameters were not measurable and, if measurable, suffered from inaccuracies and/or damage or destruction of the lens being measured.

[0024] Figure 1 illustrates a flow chart of a preferred process in which light from a light source 10 is shaped at 12 into a desired beam shape as a line of light which is directed onto a lens positioned in a lens holding fixture at 14. An image of the illuminated lens is directed by imaging optics 16 onto a camera 18, and an image is captured by a frame grabber 20, and digitally stored in memory at 22. The stored digital image is then subjected to image processing, including image enhancement at 24, curve fitting at 26, and measurement of pertinent parameters of the lens by the application of appropriate algorithms at 28, and the measured parameters are then displayed at 30.

[0025] The light source may be any high intensity light generator such as a laser diode, arc lamp, or high radiance LED. Reduction to practice has been with a laser, however a high radiance LED may be preferred in some embodiments. A preferred wavelength may be infrared (IR) just in the invisible range. The required light intensity is dependent upon the sensitivity of the detection system. At the extremes, too high an intensity could damage or modify the lens being measured, while at the other extreme, no detectible image would be generated. The ideal is a small thin line of intense light in a small source.

[0026] Figure 2 illustrates one embodiment of an optical arrangement for shaping and focusing a beam of light, in which light from a source 34 passes through a spatial filter 36, and is collimated by a collimating lens 38. A cylindrical lens 40 focuses the collimated beam into a line of light at the contact lens 41. A mirror 42 is angularly adjustable to properly position the focused line of light relative to the contact lens. The contact lens is

positioned on a pedestal 44 in an observation support cup 46 in which it is immersed in saline solution.

[0027] Figure 2 illustrates a basic approach to providing the cross-sectioning light and picking up the scattered light image. A line of light can be formed by spatially filtering, collimating and cylindrically focusing an Ar²⁺ (4880 Å, nominally 20 mW) laser beam. The resultant line of light beam passes through a mounting cell, as shown in Figures 2-10, holding a lens immersed in saline solution. The scattered light is received by a lens which focuses it onto a detection camera.

[0028] The lens being measured can be positioned using a support fixture 14, such as that illustrated in greater detail in Figures 3-10. Figures 3, 4 and 5 are respectively top planar, and end and side elevational, views of a support fixture for holding a contact lens during the measurement technique of the present invention. Figures 6 and 7 are respectively side elevational and top planar views of a central support button and surrounding alignment posts to properly position a contact lens within the support fixture. Figures 8 and 9 are respectively top planar and side elevational views of an optical glass flat, having a prism positioned on top thereof, positioned on slide rails in the support fixture, and Figure 10 is a side elevational view of only the optical flat and slide rail assembly.

[0029] Referring to Figures 3-10, a central support button 50 and cooperating alignment posts 52 are positioned at level A, Figure 5, in the fixture 14. The top of the alignment posts 52 do not extend above a level B in the fixture 14. An optical flat 54 with a prepositioned 10 degree wedge prism 56 is slidably engaged on slide rails 58 which rest at level B in the fixture 14. The lower surface of the optical flat 54 is positioned slightly below the level of the saline solution to remove any optical distortions as might otherwise be caused by ripples on the surface of the saline solution.

[0030] In operation, a cavity 60 in the fixture is filled with saline solution. The optical flat 54 guided by the slide rails 58 is slid to the right (in Figure 5) so as to clear the area over the button 50 and cooperating alignment posts 52. The lens being measured is dropped or lowered into the saline solution between the three essentially uniformly positioned alignment posts 52. As the lens sinks in the saline solution, it normally touches (bumps) one or more of the alignment posts 52 and comes to rest on the top of the support button 50 in an essentially horizontal position. The optical flat 54 is then slid to the left extreme (in Figure 5) which positions it properly above the lens for an optical sectioning measurement.

[0031] The mounting cell 14 is designed to allow most of the excess laser light to be absorbed at the bottom of the cell out of the view of the camera. The optical flat 54 and wedge prism 56 are used with the cell in the detection system to aid in correcting image distortions produced by the surface of the solution covering the lens and the viewing angle.

[0032] The lens can be correctly positioned by hand with respect to the scanning line of light, or the position of the scanning line of light can be adjusted, as by the mirror 42, so as to cause an image to occur on a desired diameter (normally the center diameter) of the lens being measured. In appropriate circumstances, the contact lens might be rotated to position the line of light along a different meridian (different angular diameter) of the lens. In a continuous mode of operation, such as on a production line, the light source is energized, and the image from the camera is checked to verify that the light image is on the desired proper diameter. Either the camera or the holder can be physically adjusted so as to place the image on a selected diameter. The slight adjustment movement can be provided by motors or by a positioning cylinder.

[0033] The energized light source causes a detectable line of light (through a vertical section of the contact lens) to be imaged, and allows for either the holder or the camera to be spatially adjusted. Movement must be only to and fro so that the line of light illuminating the lens is maintained in parallel alignment with the imaging camera so as to not introduce distortion into the subsequent image enhancement and measurement.

[0034] When the light source illuminates the mounted lens, light is scattered by the surfaces of the lens and produces a bright area on the external surfaces of the lens (the illuminated surfaces contacted by the line of light). The prism 56 provides a suitable magnification (spread) of the image which is relayed by an imaging optical system 61 so as to nearly fill the detection area or screen of the imaging camera 18. One advantageous position for the imaging camera 18 is at a right angle to the light source at the level of the contact lens specimen. Practicality dictates that the camera be elevated and view the lens at an angle. The camera views the contact lens over the edge of the cup and at an angle greater than the critical angle. The critical angle is defined as the minimum angle at which light is transmitted through the surface of the saline solution, and below which all light is reflected by the surface of the saline solution and none transmitted. A saline-air interface correction is required as explained herein-below. The imaging camera is positioned to account for the Scheimpflug effect, i.e. all optical paths are of equal length. The raw image is captured by a frame grabber 20 and transferred to digital storage 22.

[0035] As illustrated in Figures 8 and 9, the illuminating light 62 is usually positioned normally to the surface of the optical flat 54 directly above a contact lens 64, and is in the form of a line of light 66.

[0036] The image detection apparatus can incorporate a COHU Model 4810 Camera and Data Translation Model 2855 Frame Grabber. A Melles-Griot Cooke Triplet lens optimized for infinite conjugate images a cross-sectional image onto the camera, accounting for the Scheimpflug condition.

[0037] Software has been developed to process the

image, including image acquisition, filtering, sorting and calculations. An image processing macro routine combines many of the morphological routines into one sequence which is executed for each image, the result of which is stored digitally. The stored image is then input to a software routine for sorting and calculation of parameters. In greater detail, the image is acquired and preprocessed by several stages of filtering for the purpose of removing extraneous background noise. The filtered image is then thresholded so that only the lens profile is visible. The profile is then fit to cartesian coordinates, smoothed with a sliding three point filter, and translated into two arrays, a first array for the back surface, and a second array for the front surface. Each surface is then inputted to a curve fitting algorithm and its function coefficients calculated.

[0038] The parameter calculation is based upon a powerful nonlinear regression technique based upon the residuals error from a Taylor Series expansion of the expected curve profile. In greater detail, the estimates of the time residual differences between empirical values of the fitting function and actual values, and the estimated residuals, are incrementally improved by expanding the actual functional residuals with a linear Taylor series about the estimated values. This equation is reorganized in terms of the actual and estimated residuals, and a set of parameters is found which minimizes the sum of the squares of the true residuals. This function has a minimum value when all of its partial derivatives with regard to the fitting function coefficients are zero. This set of nominal equations is solved by obtaining the first order approximations to the incremental improvements mentioned above. The process is then iterated using the improved values until the increments fall below a specified tolerance. This method tends to converge very rapidly, and allows the data to be fit to any arbitrary function for contact lenses, which allows the output of the software to be used as feedback in a manufacturing process.

[0039] Figure 11 illustrates a curve fit approximation to the measured points of a contact lens pursuant to the processing techniques of the present invention, with the curve being of sag in pixels versus c distance in pixels across a measured cross-section of a contact lens.

[0040] Optical sectioning of a lens is provided by the present invention to improve the accuracy of lens parameter measurements. The most critical parameters include center thickness, thickness profile, radii of curvature and asphericity of the front curve, back curve and lenticular curve, and the diameter as a function of radial and azimuthal position. From these values the lens power can also be readily calculated from known equations.

[0041] In the optical sectioning technique, the lens is optically sectioned using a pseudo-coherent light source which is scattered sufficiently from the illuminated surface of the lens material. The image is captured by a solid state camera and frame grabber, and analyzed using typical image processing algorithms. In one

embodiment, the technique was evaluated using an Argon ion laser emitting at the 488 nm line with a power of 30 mW, a COHU 4810 CCD camera and a Data Translation 2855 frame grabber. Tests were conducted using several dozen soft hydrogel contact lenses. The results indicated that the optical or laser sectioning technique measured the center thickness, the thickness profile, the radii of curvature of the front curve and the back curve, the diameter, the lenticular radius of curvature, and the asphericity as a function of radial and azimuthal position repeatably and with sufficient accuracy. Therefore, the lens power could be calculated with repeatability and accuracy.

[0042] While several embodiments and variations of the present invention for a lens parameter measurement using optical sectioning are described in detail herein, it should be apparent that the disclosure and teachings of the present invention will suggest many alternative designs to those skilled in the art.

Claims

1. A method of measuring desired parameters of a contact lens (64) by optical sectioning comprising:

- a. positioning a contact lens (64) on a support fixture (46);
- b. generating a line of light (66);
- c. directing the line of light (66) through the contact lens (64);
- d. detecting an image of the light scattered at the surfaces of the contact lens (64); and
- e. analysing the detected light image to measure the desired parameters of the contact lens (64); characterised in that:

the line of light is directed through a selected diameter of the contact lens (64) such that the line of light (66) bisects the contact lens;

the step of detecting the image of the light is performed on light scattered at the surfaces of the contact lens (64) at the selected diameter to generate a cross-sectional image at the selected diameter; and deducing the desired parameters of the contact lens (64) from said cross-sectional image.

2. A method as claimed in claim 1, wherein the analysing step provides the measured parameters of at least four basic parameters of a contact lens (64) comprising the diameter (D), front radius of curvature (FC), back radius of curvature (BC); and centre thickness (CT).
3. A method as claimed in claim 1, wherein the ana-

- lysing step provides the measured parameters of the contact lens (64) which include the front radius of curvature with aspheric form, the back radius of curvature with aspheric form, the centre thickness, the diameter, the lenticular curve radius, the peripheral curve radius, the sagittal height, aspherical deviations, and the power of the lens.
4. A method as claimed in any preceding claim, wherein the line of light (66) is directed onto a support fixture which includes a container (46) in which a pedestal (44) is positioned, the container (46) is filled with a saline solution, and the lens (64) is placed on the pedestal (44) completely immersed in the solution, and the line of light (66) is directed over the edge of the container (46) and through a selected diameter of the contact lens (64).
 5. A method as claimed in claim 4, wherein a charge coupled television (CCTV) imaging camera (18) detects the image of light scattered from the surfaces of the contact lens (64).
 6. A method as claimed in claim 5, wherein the imaging camera (18) is elevated with respect to and views the lens (64) at an angle greater than the critical angle relative to the surface of the saline solution, which is the minimum angle at which light is transmitted and below which all light is reflected and none transmitted by the surface of the saline solution.
 7. A method as claimed in any preceding claim, wherein the contact lens (64) is immersed in saline packaging solution in a packaging container.
 8. A method as claimed in claim 1, wherein the detection system includes an optical flat, an optical prism mounted on the optical flat, and an imaging lens system.
 9. A method as claimed in any preceding claim, wherein the image is analysed by a software program which uses a non-linear least squares fitting data processing approach.
 10. A method as claimed in any preceding claim, wherein the step of analysing includes an image processing macro routine which combines several morphological routines into one sequence which is executed for each image, the result of which is stored digitally, and the stored image is then input to a software routine for calculation of selected parameters of the contact lens (64).
 11. A method as claimed in claim 10, wherein the parameter calculation is based upon a non-linear regression based upon residuals error from a Taylor Series expansion of an expected contact lens (64) curve profile.
 12. A method as claimed in any preceding claim, wherein the step of generating includes the steps of shaping and focusing a beam of light in which light from a light source passes through a spatial filter (36), is collimated by a collimating lens (38), and is focused by a cylindrical lens (40) into a line of light (66) at the contact lens (64) being measured.
 13. A method as claimed in any preceding claim, wherein the line of light (66) is directed onto the support fixture which includes a central support button (50), surrounded by alignment posts (52) to properly position a contact lens (64) within the support fixture.
 14. A method as claimed in claim 12, wherein the central support button (50) and alignment posts (52) are positioned at a level A in the fixture, and the top of the alignment posts (52) do not extend above a level B in the fixture, an optical flat (54) with a prism (56) positioned thereon is slideably positioned on slide rails (58) and rests at the level B, a cavity (60) in the fixture is filled with saline solution, the optical flat (54) is guided by the slide rails (58) to slide to one side while clearing the area over the central support button (50) and alignment posts (52), the contact lens (64) being measured is lowered into the saline solution between the alignment posts (52), and comes to rest on the central support button (50) in an essentially horizontal position, and the optical flat (54) is then slid to a second opposite side to position it above the contact lens (64).
 15. A method as claimed in claim 13, wherein the optical flat (54) has its lower surface immersed in the saline solution to eliminate optical distortions by the surface of the solution.
 16. A method as claimed in any preceding claim, wherein the contact lens (64) is immersed in saline solution while positioned on the support fixture.
 17. A method as claimed in any preceding claim, wherein light from a light source is shaped into a line of light (66) which is directed onto a contact lens (64) positioned in the support fixture, light from the illuminated contact lens (64) is directed by imaging optics (16) onto a camera (18), an image is captured by a frame grabber (20) and digitally stored in memory (22), the stored digital image is then subjected to image processing, including image enhancement (24), curve fitting (26), and measurement of parameters of the lens by the application of selected algorithms (28).
 18. A method as claimed in any preceding claim, where-

in the detecting step is performed with a camera (18) positioned to view the contact lens (64) through a prism (56) and at an angle relative to a vertical.

19. Apparatus for measuring desired parameters of a contact lens (64) by optical sectioning comprising:

- a. a support fixture for positioning a contact lens (64) being measured;
- b. means for generating and directing a line of light (66) through the contact lens (64); and
- c. means for detecting an image of the light scattered at the surfaces of the contact lens (64), and for analysing the detected light image to measure the desired parameters of the contact lens (64); **characterised in that:**

the line of light (66) is directed through a selected diameter of the contact lens (64) such that the line of light (66) bisects the contact lens; and

the detecting means detect light scattered at the surfaces of the contact lens (64) at the selected diameter to generate a cross-sectional image at the selected diameter, from which the desired parameters of the contact lens (64) can be deduced.

20. Apparatus as claimed in claim 19, wherein the support fixture includes a container (46) in which a pedestal (44) is positioned, the container (46) is filled with a saline solution, and the lens (64) is placed on the pedestal (44) completely immersed in the solution, and the line of light (66) is directed over the edge of the container (46) and through a selected diameter of the contact lens (64).

21. Apparatus as claimed in claim 20, wherein a charge coupled television (CCTV) imaging camera (18) detects the image of light scattered from the surfaces of the contact lens (64).

22. Apparatus as claimed in claim 21, wherein the imaging camera (18) is elevated with respect to and views the lens (64) at an angle greater than the critical angle relative to the surface of the saline solution, which is the minimum angle at which light is transmitted and below which all light is reflected and none transmitted by the surface of the saline solution.

23. Apparatus as claimed in claim 19, wherein the contact lens (64) is immersed in saline packaging solution in a packaging container.

24. Apparatus as claimed in claim 19, wherein the detection system includes an optical flat (54), an optical prism (56) mounted on the optical flat (54), and

an imaging lens system.

25. Apparatus as claimed in claim 19, wherein said generating and directing means includes an arrangement in which light from a light source passes through a spatial filter (36), is collimated by a collimating lens (38), and is focused by a cylindrical lens (40) into a line of light (66) at the contact lens (64) being measured.

26. Apparatus as claimed in claim 19, wherein the support fixture includes a central support button (50), surrounded by alignment posts (52) to properly position a contact lens (64) within the support fixture.

27. Apparatus as claimed in claim 26, wherein the central support button (50) and alignment posts (52) are positioned at a level A in the fixture, and the top of the alignment posts (52) do not extend above a level B in the fixture, an optical flat (54) with a prism (56) positioned thereon is slideably positioned on slide rails (58) and rests at the level B, a cavity (60) in the fixture is filled with saline solution, the optical flat (54) is guided by the slide rails (58) to slide to one side while clearing the area over the central support button (50) and alignment posts (52), the contact lens (64) being measured is lowered into the saline solution between the alignment posts (52), and comes to rest on the central support button (50) in an essentially horizontal position, and the optical flat (54) is then slid to a second opposite side to position it above the contact lens (64).

28. Apparatus as claimed in claim 19, including means for immersing the contact lens in saline solution while positioned on the support fixture.

29. Apparatus as claimed in claim 19, wherein light from the illuminated contact lens (64) is directed by imaging optics (16) onto a camera (18), an image is captured by a frame grabber (20) and digitally stored in memory (22), and the stored digital image is then subjected to image processing for measurement of the parameters of the lens (64).

Patentansprüche

1. Verfahren zum Messen gewünschter Parameter einer Kontaktlinse (64) mittels optischen Schneidens mit folgenden Schritten:

- a. Anordnen einer Kontaktlinse (64) auf einer Unterstützungsbefestigung (46);
- b. Erzeugen einer Linie von Licht (66);
- c. Richten der Linie von Licht (66) durch die Kontaktlinse (64);
- d. Erfassen eines Abbilds des an der Oberflä-

- che der Kontaktlinse (64) gestreuten Lichts; und
- e. Analysieren des erfaßten Lichtabblids, um die gewünschten Parameter der Kontaktlinse (64) zu messen; **dadurch gekennzeichnet, daß** die Linie von Licht durch einen ausgewählten Durchmesser der Kontaktlinse (64) gerichtet wird, so daß die Linie von Licht (66) die Kontaktlinse zweiteilt;
- der Schritt des Erfassens des Abblids des Lichts an dem Licht ausgeführt wird, daß an der Oberfläche der Kontaktlinse an dem ausgewählten Durchmesser zum Erzeugen eines Querschnittsabblids an dem ausgewählten Durchmesser gestreut wird; und
- Ableiten der gewünschten Parameter der Kontaktlinse (64) aus dem Querschnittsabbild.
2. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, daß** der Analysierschritt die gemessenen Parameter von mindestens vier Grundparametern einer Kontaktlinse (64) liefert, die den Durchmesser (D), den vorderen Krümmungsradius (FC), den hinteren Krümmungsradius (BC) und die Mittelpunkt-
dicke (CT) umfassen.
 3. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, daß** der Analysierschritt die gemessenen Parameter der Kontaktlinse (64) liefert, welche den vorderen Krümmungsradius mit asphärischer Form, den hinteren Krümmungsradius mit asphärischer Form, die Mittelpunkt-
dicke, den Durchmesser, den Linsenkrümmungsradius, den Randkrümmungsradius, die sagittale Höhe, asphärische Abweichungen und die Brechkraft der Linse umfassen.
 4. Verfahren nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, daß** die Linie von Licht (66) auf eine Unterstützungsbefestigung gerichtet ist, welche einen Behälter (46) umfaßt, in dem ein Sockel (44) angeordnet ist, wobei der Behälter mit einer Salzlösung gefüllt wird, und die Linse (64) auf dem Sockel (44) angeordnet wird, wobei die Linse vollständig in der Lösung untergetaucht ist, und die Linie von Licht (66) über die Kante des Behälters (64) und durch einen ausgewählten Durchmesser der Kontaktlinse (64) gerichtet wird.
 5. Verfahren nach Anspruch 4, **dadurch gekennzeichnet, daß** eine ladungsträgergekoppelte Fernseh-(CCTV)-Abbildungskamera (18) das Abbild des von den Oberflächen der Kontaktlinse (64) gestreuten Lichts erfaßt.
 6. Verfahren nach Anspruch 5, **dadurch gekennzeichnet, daß** die Abbildungskamera (18) bezüglich der Linse erhöht wird und die Linse unter einem Winkel betrachtet, der größer als der kritische Winkel bezüglich der Oberfläche der Salzlösung ist, welches der minimale Winkel ist, unter dem Licht weitergeleitet wird und unterhalb dessen alles Licht reflektiert wird und kein Licht von der Oberfläche der Salzlösung weitergeleitet wird.
 7. Verfahren nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, daß** die Kontaktlinse (64) in einer Verpackungssalzlösung in einem Verpackungsbehälter untergetaucht wird.
 8. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, daß** das Erfassungssystem eine optische Planfläche, ein optisches auf der optischen Planfläche montiertes Prisma und ein Abbildungslinsensystem umfaßt.
 9. Verfahren nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, daß** das Abbild von einem Softwareprogramm analysiert wird, daß einen nicht-linearen Datenanpassungsverfahrensansatz nach dem Verfahren der kleinsten Fehlerquadrate nutzt.
 10. Verfahren nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, daß** der Schritt des Analysierens eine Abbildbearbeitungs-Makroroutine umfaßt, die einige morphologische Routinen in eine Abfolge kombiniert, die für jedes Abbild ausgeführt wird, wobei das Ergebnis hiervon digital gespeichert wird und das gespeicherte Abbild dann in eine Softwareroutine zum Berechnen der ausgewählten Parameter der Kontaktlinse (64) eingegeben wird.
 11. Verfahren nach Anspruch 10, **dadurch gekennzeichnet, daß** die Parameterberechnung auf einer nicht-linearen Regression basiert, die auf einem Restefehler von einer Taylorreihenentwicklung eines erwarteten Krümmungsprofils der Kontaktlinse (64) basiert.
 12. Verfahren nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, daß** der Schritt des Erzeugens den Schritt des Formens und Fokussierens eines Lichtstrahls umfaßt, bei dem das Licht von einer Lichtquelle durch einen räumlichen Filter (36) passiert, von einer Kollimierungslinse (38) kollimiert wird und mittels einer zylindrischen Linse (40) in eine Linie von Licht (66) an der Kontaktlinse (64) fokussiert wird, die vermessen wird.
 13. Verfahren nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, daß** die Linie des Lichts (66) auf die Unterstützungsbefestigung

- gerichtet ist, die einen zentralen Unterstützungsknopf umfaßt, der von Ausrichtungspfeilen (52) umgeben ist, um eine Kontaktlinse (64) innerhalb der Unterstützungsbefestigung ordentlich zu positionieren.
14. Verfahren nach Anspruch 12, **dadurch gekennzeichnet, daß** der zentrale Unterstützungsknopf (50) und die Ausrichtungspfeile (52) auf einem Niveau A in der Befestigung angeordnet sind und die Spitze der Ausrichtungspfeile sich nicht über ein Niveau B in der Befestigung erstreckt, wobei eine optische Planfläche (54) mit einem hierauf angeordneten Prisma (56) verschiebbar auf Gleitschienen (58) angeordnet ist und auf dem Niveau B ruht, wobei ein Hohlraum (60) in der Befestigung mit Salzlösung gefüllt wird, die optische Planfläche (54) von den Gleitschienen (58) geführt wird, um zu einer Seite zu gleiten, während das Gebiet über dem zentralen Unterstützungsknopf und den Ausrichtungspfeilen (52) freigeräumt wird, wobei die Kontaktlinse (64), die vermessen wird, in die Salzlösung zwischen die Ausrichtungspfeile (52) abgesenkt wird und auf dem zentralen Unterstützungsknopf (50) in einer im wesentlichen horizontalen Stellung zur Ruhe kommt und die optische Planfläche (54) dann zu einer zweiten entgegengesetzten Seite geschoben wird, um sie über der Kontaktlinse (64) zu positionieren.
15. Verfahren nach Anspruch 13, **dadurch gekennzeichnet, daß** die optische Planfläche 54 eine untere Oberfläche aufweist, die in die Salzlösung eingetaucht wird, um optische Störungen von der Oberfläche der Lösung zu beseitigen.
16. Verfahren nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, daß** die Kontaktlinse (64) in der Salzlösung untergetaucht wird, während sie auf der Unterstützungsbefestigung angeordnet wird.
17. Verfahren nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, daß** das Licht von einer Lichtquelle in eine Linie des Lichts (66) geformt wird, welche auf eine Kontaktlinse (64) gerichtet ist, die in der Unterstützungsbefestigung angeordnet ist, wobei das Licht von der angestrahlten Kontaktlinse (64) von Abbildungsoptiken (16) auf eine Kamera (18) gerichtet wird, wobei ein Abbild von einem Framegrabber (20) aufgenommen und digital in einem Speicher (22) gespeichert wird, wobei das gespeicherte Abbild dann einer Abbildungsbearbeitung unterworfen wird, einschließlich einer Abbildungsverstärkung (24), einer Kurvenanpassung (26) und einer Messung von Parametern der Linse mittels der Anwendung von ausgewählten Algorithmen (28).
18. Verfahren nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, daß** der Erfassungsschritt mit einer Kamera (18) ausgeführt wird, die angeordnet wird, um die Kontaktlinse (64) durch ein Prisma (56) und unter einem Winkel relativ zu einer Vertikalen zu betrachten.
19. Vorrichtung zum Messen gewünschter Parameter einer Kontaktlinse (64) mittels optischen Schneidens mit:
- a. einer Unterstützungsbefestigung zum Anordnen einer Kontaktlinse (64), die vermessen wird;
 - b. Mitteln zum Erzeugen und Richten einer Linie von Licht (66) durch die Kontaktlinse (64); und
 - c. Mitteln zum Erfassen eines Abbilds des an den Oberflächen der Kontaktlinse (64) gestreuten Lichts und zum Analysieren des erfaßten Lichtabbilds, um die gewünschten Parameter der Kontaktlinse (64) zu messen; **dadurch gekennzeichnet, daß:**
 - die Linie des Lichts (66) durch einen ausgewählten Durchmesser der Kontaktlinse (64) so gerichtet werden kann, so daß die Linie des Lichts die Kontaktlinse zweiteilt; und
 - daß die Erfassungsmittel an den Oberflächen der Kontaktlinse (64) an dem ausgewählten Durchmesser gestreutes Licht erfassen können, um ein Querschnittsabbild an dem ausgewählten Durchmesser zu erzeugen, von dem die gewünschten Parameter der Kontaktlinse (64) abgeleitet werden können.
20. Vorrichtung nach Anspruch 19, **dadurch gekennzeichnet, daß** die Unterstützungsbefestigung einen Behälter (46) umfaßt, in dem ein Sockel (44) angeordnet ist, wobei der Behälter (46) mit einer Salzlösung gefüllt ist und die Linse (64) auf dem Sockel (44) angeordnet ist, wobei die Linse vollständig in der Lösung untergetaucht ist und die Linie des Lichts (66) über eine Kante des Behälters (46) und durch einen ausgewählten Durchmesser der Kontaktlinse (64) gerichtet ist.
21. Verfahren nach Anspruch 20, **dadurch gekennzeichnet, daß** eine ladungsträgergekoppelte Fernseh-(CCTV)-Abbildungskamera (18) das Abbild des von den Oberflächen der Kontaktlinse (64) gestreuten Lichts erfaßt.
22. Vorrichtung nach Anspruch 21, **dadurch gekennzeichnet, daß** die Abbildungskamera (18) bezüglich der Linse (64) erhöht ist und die Linse unter ei-

nem Winkel betrachtet, der größer als der kritische Winkel bezüglich der Oberfläche der Salzlösung ist, welcher der minimale Winkel ist, unter dem Licht weitergeleitet wird und unterhalb dessen alles Licht reflektiert wird und kein Licht von der Oberfläche der Salzlösung weitergeleitet wird.

23. Vorrichtung nach Anspruch 19, **dadurch gekennzeichnet, daß** die Kontaktlinse (64) in einer Verpackungssalzlösung in einem Verpackungsbehälter untergetaucht ist.
24. Vorrichtung nach Anspruch 19, **dadurch gekennzeichnet, daß** das Erfassungssystem eine optische Planfläche (54), ein optisches auf der optischen Planfläche (54) montiertes Prisma (56) und ein Abbildungslinsensystem umfaßt.
25. Vorrichtung nach Anspruch 19, **dadurch gekennzeichnet, daß** die Mittel zum Erzeugen und Richten eine Anordnung umfassen, in der Licht von einer Lichtquelle durch einen räumlichen Filter (36) passieren kann, von einer Kollimierungslinse (38) kollimiert werden und von einer zylindrischen Linse (40) in eine Linie von Licht (66) auf der Kontaktlinse (64) fokussiert werden kann, die vermessen wird.
26. Vorrichtung nach Anspruch 19, **dadurch gekennzeichnet, daß** die Unterstützungsbefestigung einen zentralen Unterstützungsknopf (50) umfaßt, der von Ausrichtungspfosten (52) umgeben ist, um eine Kontaktlinse (64) innerhalb der Unterstützungsbefestigung ordentlich zu positionieren.
27. Vorrichtung nach Anspruch 26, **dadurch gekennzeichnet, daß** der zentrale Unterstützungsknopf (50) und die Ausrichtungspfosten (52) auf einem Niveau A in der Befestigung angeordnet sind und die Spitze der Ausrichtungspfosten sich nicht über ein Niveau B in der Befestigung erstreckt, wobei eine optische Planfläche (54) mit einem hierauf angeordneten Prisma (56) verschiebbar auf Gleitschienen (58) angeordnet ist und auf dem Niveau B ruht, wobei ein Hohlraum (60) in der Befestigung mit Salzlösung gefüllt werden kann, wobei die optische Planfläche (54) von den Gleitschienen (58) geführt wird, um zu einer Seite zu gleiten, während das Gebiet über dem zentralen Unterstützungsknopf und den Ausrichtungspfosten (52) freigeräumt wird, die Kontaktlinse (64), die vermessen wird, in die Salzlösung zwischen die Ausrichtungspfosten (52) abgesenkt werden kann und auf dem zentralen Unterstützungsknopf (50) in einer im wesentlichen horizontalen Stellung zur Ruhe kommt und die optische Planfläche (54) dann zu einer zweiten entgegengesetzten Seite geschoben werden kann, um sie über der Kontaktlinse (64) zu positionieren.

28. Vorrichtung nach Anspruch 19, **gekennzeichnet durch** Mittel zum Untertauchen der Kontaktlinse in der Salzlösung, während die Kontaktlinse auf der Unterstützungsbefestigung angeordnet ist.

29. Vorrichtung nach Anspruch 19, **dadurch gekennzeichnet, daß** das Licht der ausgeleuchteten Kontaktlinse (64) mittels Abbildungsoptiken (16) auf eine Kamera (18) gerichtet ist, wobei ein Abbild von einem Framegrabber (20) aufgenommen und digital in einem Speicher (22) gespeichert werden kann, und das gespeicherte digitale Abbild dann einer Abbildungsverarbeitung zum Messen der Parameter der Linse (64) unterzogen werden kann.

Revendications

1. Procédé pour mesurer des paramètres souhaités d'une lentille de contact (64) par sectionnement optique comprenant les étapes suivantes :

- a. positionner une lentille de contact (64) sur un support de fixation (46) ;
- b. générer un trait de lumière (66) ;
- c. diriger le trait de lumière (66) à travers la lentille de contact (64) ;
- d. détecter une image de la lumière dispersée sur les surfaces de la lentille de contact (64) ; et
- e. analyser l'image de la lumière détectée pour mesurer les paramètres souhaités de la lentille de contact (64) ; **caractérisé en ce que :**

le trait de lumière est dirigé sur un diamètre sélectionné de la lentille de contact (64) de façon telle que le trait de lumière (66) partage en deux parties égales la lentille de contact ;
l'étape consistant à détecter l'image de la lumière est réalisée sur la lumière dispersée sur les surfaces de la lentille de contact (64) sur le diamètre sélectionné pour générer une image en coupe du diamètre sélectionné ; et
la déduction des paramètres souhaités de la lentille de contact (64) étant faite à partir de ladite image en coupe.

2. Procédé selon la revendication 1, dans lequel l'étape consistant à analyser fournit les paramètres mesurés d'au moins quatre paramètres de base d'une lentille de contact (64) comprenant le diamètre (D), le rayon de courbure avant (FC), le rayon de courbure arrière (BC), et l'épaisseur centrale (CT).
3. Procédé selon la revendication 1, dans lequel l'étape consistant à analyser fournit les paramètres mesurés de la lentille de contact (64) qui comprennent

- le rayon de courbure avant avec une forme asphérique, le rayon de courbure arrière avec une forme asphérique, l'épaisseur centrale, le diamètre, le rayon de courbure lenticulaire, le rayon de courbure périphérique, la hauteur sagittale, les déviations asphériques, et la puissance de la lentille.
4. Procédé selon l'une quelconque des revendications précédentes, dans lequel le trait de lumière (66) est dirigé sur un support de fixation qui comprend un récipient (46) dans lequel un piédestal est positionné, le récipient (46) est rempli avec une solution saline, et la lentille de contact (64) est placée sur le piédestal (44) complètement immergée dans la solution, et le trait de lumière (66) est dirigé au-dessus du bord du récipient (46) et sur un diamètre sélectionné de la lentille de contact (64).
 5. Procédé selon la revendication 4, dans lequel une caméra d'imagerie de télévision (18) à couplage de charge (CCTV) détecte l'image de la lumière dispersée par les surfaces de la lentille de contact (64).
 6. Procédé selon la revendication 5, dans lequel la caméra d'imagerie (18) est en position élevée par rapport à et dirigée vers la lentille de contact (64) avec un angle supérieur à l'angle critique relativement à la surface de la solution saline, qui est un angle minimum auquel la lumière est transmise et sous lequel toute la lumière est réfléchie et aucune lumière n'est transmise par la surface de la solution saline.
 7. Procédé selon l'une quelconque des revendications précédentes, dans lequel la lentille de contact (64) est immergée dans une solution saline réceptrice dans un récipient récepteur.
 8. Procédé selon la revendication 1, dans lequel le système de détection comprend un élément optique plat, un prisme optique monté sur l'élément optique plat, et un système de lentilles d'imagerie.
 9. Procédé selon l'une quelconque des revendications précédentes, dans lequel l'image est analysée par un logiciel qui utilise une approche de traitement des données par lissage non-linéaire par les moindres carrés.
 10. Procédé selon l'une quelconque des revendications précédentes, dans lequel l'étape consistant à analyser comprend une routine macro de traitement d'image qui combine diverses routines morphologiques en une séquence qui est exécutée pour chaque image, dont le résultat est stocké numériquement, et l'image stockée est ensuite entrée dans un logiciel de calcul de paramètres sélectionnés de la lentille de contact (64).
 11. Procédé selon la revendication 10, dans lequel le paramètre de calcul est basé sur une régression non-linéaire basée sur les erreurs résiduelles par rapport à un développement en série de Taylor d'un profil de courbe de lentille de contact (64) attendu.
 12. Procédé selon l'une quelconque des revendications précédentes, dans lequel l'étape consistant à générer comprend les étapes consistant à former et focaliser un faisceau de lumière dans lequel la lumière venant d'une source lumineuse passe à travers un filtre spatial (36), est collimaté par une lentille de collimation (38), et est focalisé par une lentille cylindrique (40) dans un trait de lumière (66) sur la lentille de contact (64) étant mesurée.
 13. Procédé selon l'une quelconque des revendications précédentes, dans lequel le trait de lumière (66) est dirigé sur l'accessoire de support qui comprend un bouton de support central (50), entouré par des postes d'alignement (52) pour positionner correctement une lentille de contact (64) dans l'accessoire de support.
 14. Procédé selon la revendication 12, dans lequel le bouton de support central (50) et les postes d'alignement (52) sont positionnés en un niveau A sur l'accessoire, et le haut des postes d'alignement (52) ne s'étend pas au-dessus d'un niveau B dans l'accessoire, un élément optique plat (54) avec un prisme (56) positionné sur celui-ci est positionné de manière coulissante sur des rails de coulissement (58) et repose au niveau B, une cavité (60) dans l'accessoire est remplie de solution saline, l'élément optique plat (54) est guidé par les rails de coulissement (58) pour coulisser vers un côté tout en en dégageant la zone au-dessus du bouton de support central (50) et les postes d'alignement (52), la lentille de contact (64) étant mesurée est abaissée dans la solution saline entre les postes d'alignement (52), et vient reposer sur le bouton de support central (50) dans une position essentiellement horizontale, et l'élément optique plat (54) est ensuite coulé vers un second côté opposé pour le positionner au-dessus de la lentille de contact (64).
 15. Procédé selon la revendication 13, dans lequel l'élément optique plat (54) a sa surface inférieure immergée dans la solution saline pour éliminer les distorsions optiques dues à la surface de la solution.
 16. Procédé selon l'une quelconque des revendications précédentes, dans lequel la lentille de contact (64) est immergée dans la solution saline une fois positionnée sur l'accessoire de support.
 17. Procédé selon l'une quelconque des revendications

- précédentes, dans lequel la lumière venant d'une source lumineuse est formée en un trait de lumière (66) qui est dirigé sur une lentille de contact (64) positionnée dans l'accessoire de support, la lumière venant de la lentille de contact (64) illuminée est dirigée par des optiques d'imagerie 16 sur une caméra (18), une image est capturée par un capteur d'image (20) et stockée numériquement dans le mémoire (22), l'image numérique stockée est ensuite soumise à un traitement d'image, comprenant un enrichissement d'image (24), un lissage de courbe (26), et la mesure des paramètres de la lentille par l'application d'algorithmes choisis (28).
18. Procédé selon l'une quelconque des revendications précédentes, dans lequel l'étape consistant à détecter est réalisée par une caméra (18) positionnée pour viser la lentille de contact (64) par l'intermédiaire d'un prisme (56) et avec un angle relativement à la verticale.
19. Appareil pour mesurer des paramètres souhaités d'une lentille de contact (64) par sectionnement optique comprenant :
- a. un accessoire de support pour positionner une lentille de contact (64) à mesurer ;
 - b. des moyens pour générer et diriger un trait de lumière (66) sur la lentille de contact (64) ; et
 - c. des moyens pour détecter une image de la lumière dispersée sur les surfaces de la lentille de contact (64), et pour analyser l'image lumineuse détectée pour mesurer les paramètres souhaités de la lentille de contact (64) ; **caractérisé en ce que :**
 - le trait de lumière (66) est dirigé sur un diamètre sélectionné de la lentille de contact (64) de façon telle que le trait de lumière (66) partage en deux parties égales la lentille de contact ;
 - les moyens de détection détectent la lumière dispersée sur les surfaces de la lentille de contact (64) sur le diamètre sélectionné pour générer une image en coupe du diamètre sélectionné, à partir de laquelle les paramètres dérivés de la lentille de contact (64) peuvent être déduits.
20. Appareil selon la revendication 19, dans lequel l'accessoire de support comprend un récipient (46) dans lequel un piédestal (44) est positionné, le récipient (46) est rempli avec une solution saline, et la lentille de contact (64) est placée sur le piédestal (44) complètement immergé dans la solution, et le trait de lumière (66) est dirigé au-dessus du bord du récipient (46) et sur un diamètre sélectionné de la lentille de contact (64).
21. Appareil selon la revendication 20, dans lequel une caméra d'imagerie de télévision (18) couplée en charge (CCTV) détecte l'image de la lumière dispersée par les surfaces de la lentille de contact (64).
22. Appareil selon la revendication 21, dans lequel la caméra d'imagerie (18) est en position élevée par rapport à et dirigée vers la lentille de contact (64) avec un angle supérieur à l'angle critique par rapport à la surface de la solution saline, qui est un angle minimum auquel la lumière est transmise et sous laquelle toute la lumière est réfléchie et aucune lumière n'est transmise par la surface de la solution saline.
23. Appareil selon la revendication 19, dans lequel la lentille de contact (64) est immergée dans la solution saline dans un récipient récepteur.
24. Appareil selon la revendication 19, dans lequel le système de détection comprend un élément optique plat, un prisme optique monté sur l'accessoire optique, et un système de lentille d'imagerie.
25. Appareil selon la revendication 19, dans lequel lesdits moyens de génération et de direction comprennent un agencement dans lequel la lumière venant d'une source lumineuse passe à travers un filtre spatial (36), est collimatée par une lentille de collimation (38), et est focalisée par une lentille cylindrique (40) dans un trait de lumière (66) sur la lentille de contact (64) étant mesurée.
26. Appareil selon la revendication 19, dans lequel l'accessoire de support comprend un bouton de support central (50), entouré par des postes d'alignement (52) pour positionner correctement une lentille de contact (64) dans l'accessoire de support.
27. Appareil selon la revendication 26, dans lequel le bouton de support central (50) et les postes d'alignement (52) sont positionnés en un niveau A dans l'accessoire, et le haut des postes d'alignement (52) ne s'étend pas au-dessus d'un niveau B dans l'accessoire, un élément optique plat (54) avec un prisme (56) positionné sur celui-ci est positionné de manière coulissante sur des rails de coulissement (58) et repose sur le niveau B, une cavité (60) dans l'accessoire est remplie de solution saline, l'élément optique plat (54) est guidé par les rails de coulissement (58) pour coulisser vers un côté tout en en dégageant la zone au-dessus du bouton de support central (50) et des postes d'alignement (52), la lentille de contact (64) étant mesurée est abaissée dans la solution saline entre les postes d'alignement (52), et vient reposer sur le bouton de support central (50) dans une position essentiellement horizontale, et l'élément optique plat (54) est ensuite

coulé vers un second côté opposé pour être positionné au-dessus de la lentille de contact (64).

28. Appareil selon la revendication 19, comprenant des moyens d'immersion de la lentille de contact dans la solution saline une fois positionnée sur l'accessoire de support. 5
29. Appareil selon la revendication 19, dans lequel la lumière venant d'une source lumineuse est formée en un trait de lumière (66) qui est dirigée sur une lentille de contact (64) positionnée dans l'accessoire de support, la lumière venant de la lentille de contact (64) illuminée est dirigée par des optiques d'imagerie (16) sur une caméra (18), une image est capturée par un capteur d'image (20) et stockée numériquement dans le mémoire (22), et l'image numérique stockée est ensuite soumise à un traitement d'image pour la mesure des paramètres de la lentille de contact (64). 10 15 20

25

30

35

40

45

50

55

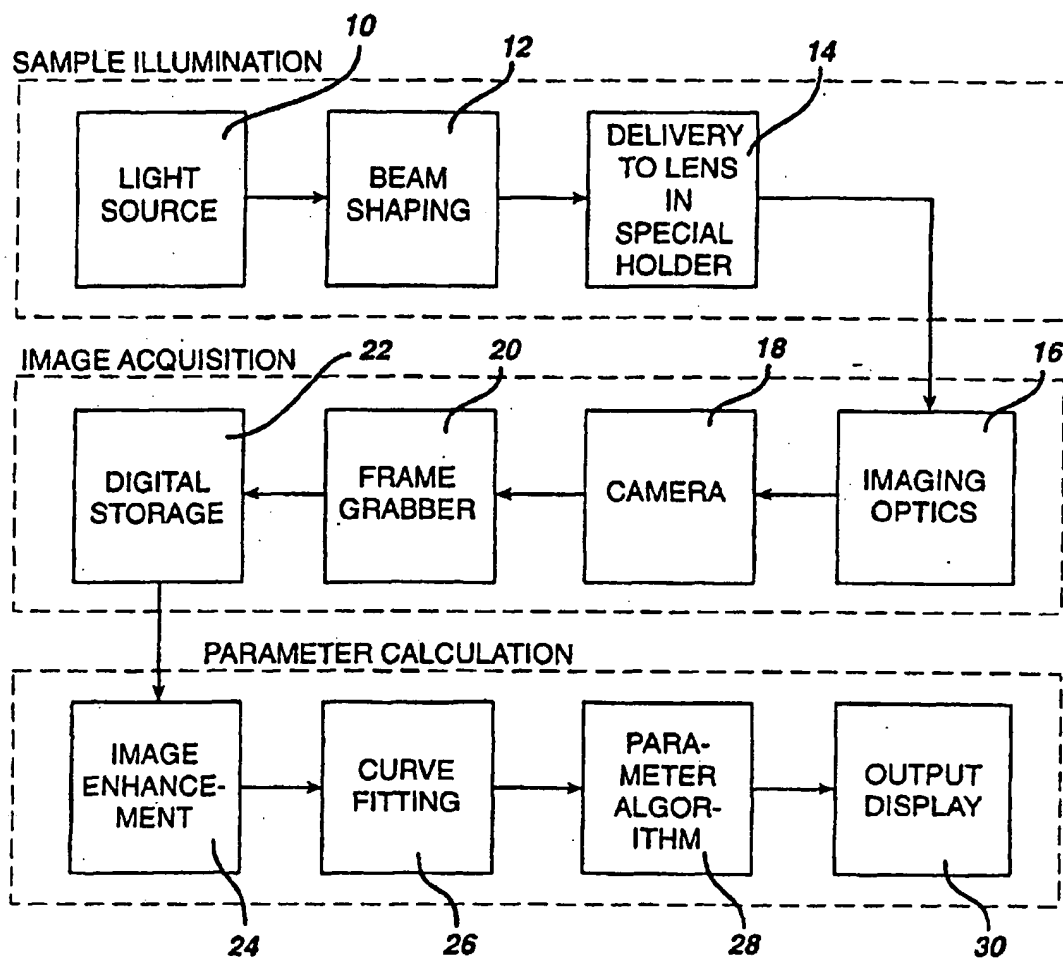
FIG.1

FIG.2

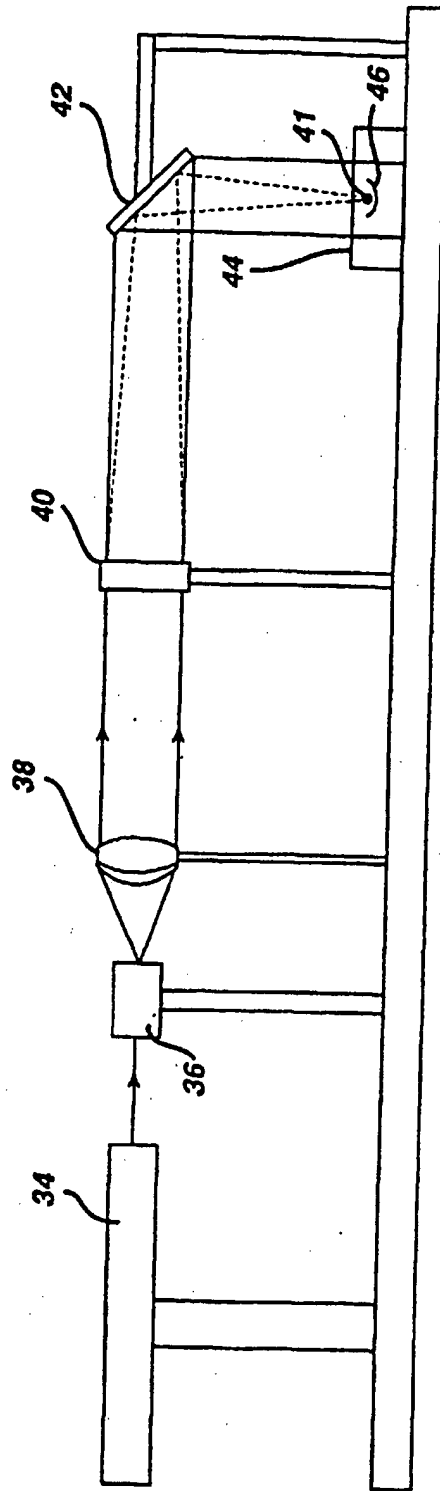


FIG.3

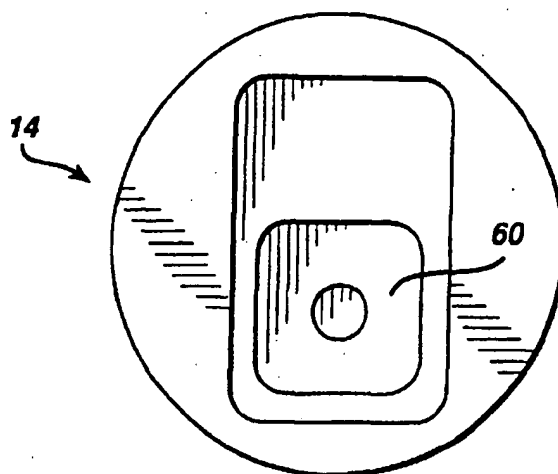


FIG.4

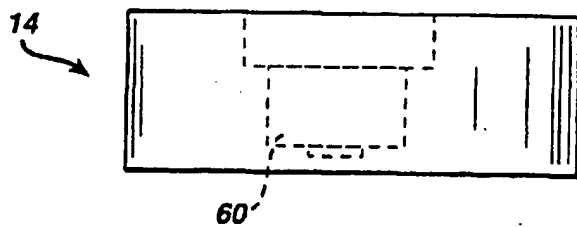


FIG.5

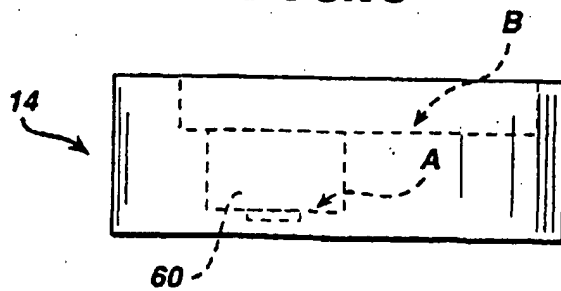


FIG.6

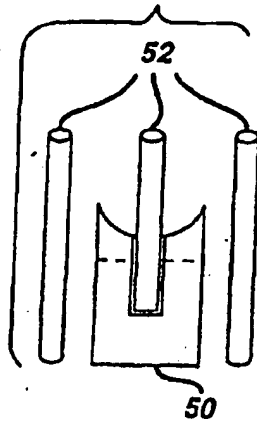


FIG.7

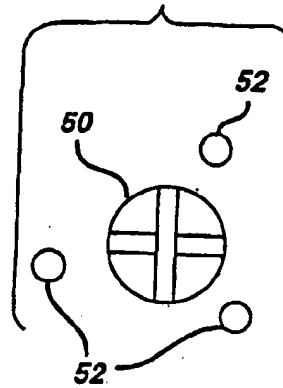


FIG.8

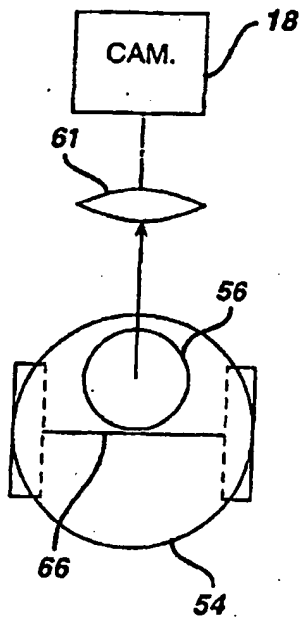


FIG.9

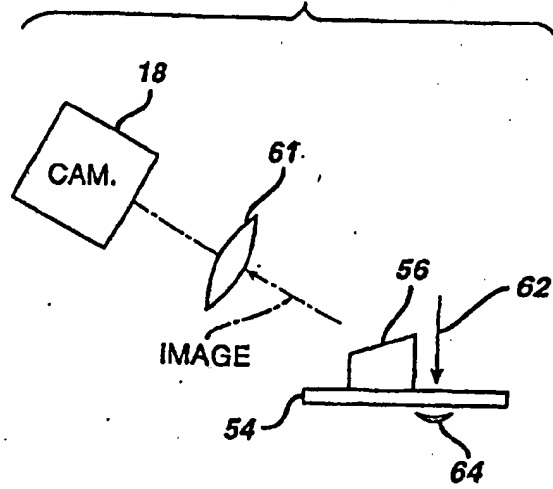


FIG.10

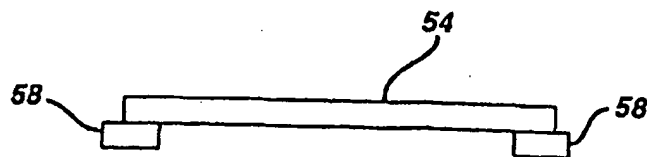


FIG. 11

